Small Reels 90–260 mm

Art. No.	D1	D2	D4	L1	L2	Material	Winding volume (dm³)	Load capacity	Weight (kg)	Q/Pallet	Q/Package	RFID	Draining holes	Lagging option	Autohole (V/U)	Colours	RIB compatible	Cut-out	Engravings	Recyclable	Label plate
2090…	90	30	11	41	38	PS	0,21	N/A	0,028	2500		-	-	-	•	-	-	-	-	•	-
2090…	90	30	26	62	58	PP	0,33	N/A	0,038	N/A	324	-	-	-	-	-	-	-	-	•	-
2100…	100	55	17	45	40	PS	0,22	N/A	0,053	5000	250	-	-	-	-	-	-	-	-	•	-
2130…	130	60	56	60	56	PS	0,58	N/A	0,053	2376	396	-	-	-	•	-	-	-	-	•	-
2130…	130	30	26	80	76	PP	0,95	N/A	0,087	2016	336	-	-	-	-	-	-	-	-	•	-
2150…	150	65	60	76	70	PS	1,00	2	0,090	2600	2600	-	-	-	-	-	-	-	-	•	-
2150…	150	65	60	166	160	PS	2,30	3	0,135	1200	1200	-	-	-	-	-	-	-	-	•	-
2160…	160	60	56	55	50	PS	0,86	N/A	0,095	2176	272	-	-	-	•	-	-	-	-	•	-
2160…	160	104	100	85	80	PS	0,93	N/A	0,09	1080	135	-	-	-	•	-	-	-	-	•	-
2160…	160	60	56	90	85	PS	1,46	N/A	0,117	1224	204	-	-	-	•	-	-	-	-	•	-
2165…	165	54	51,3	126	114	PP	2,18	N/A	0,13	480	480	-	-	-	•	-	-	-	-	•	-
2165…	165	54	51,3	215	203	PP	3,87	N/A	0,23	300	300	-	-	-	•	-	-	-	-	•	-
2196…	196	108	104	88	84	PS	1,76	N/A	0,132	420	420	-	-	-	•	-	-	-	-	•	-
2200…	195	100	60	250	210	PS	4,62	10	0,480	392	392	-	-	-	•	-	-	-	-	•	-
2200…	200	61	56	90	85	PS/PP	2,42	N/A	0,195	720	120	-	-	-	•	-	-	-	-	•	-
2200…	200	104	100	105	100	PS	2,29	N/A	0,18	630	210	-	-	-	•	-	-	-	-	•	-
2215…	215	104	100	85	80	PS	2,2	N/A	0,215	396	396	-	-	-	•	-	-	-	-	•	-
2215…	215	104	100	105	100	PS/HDPE	2,78	N/A	0,22	330	330	-	-	-	•	-	-	-	-	•	-
2215…	215	104	100	170	165	PS/HDPE	4,56	N/A	0,24	198	198	-	-	-	•	-	-	-	-	•	-
2230…	230	61	56	90	84	PS/PP	3,24	N/A	0,265	576	96	-	-	-	•	-	-	-	-	•	-
2250…	250	61	56	98	91	PS/PP	4,2	N/A	0,27	600	200	-	-	-	•	-	-	-	-	•	-
2260…	260	145	140	73	66	PS	2,41	N/A	0,51	510	170	-	-	-	•	-	-	-	-	•	-

Reels 280–435 mm

Art. No.	D1	D2	D4	L1	L2	Material	Winding volume (dm³)	Load capacity	Weight (kg)	Q/Pallet	RFID	Draining holes	Lagging option	Autohole (V/U)	Colours	RIB compatible	Cut-out	Engravings	Recyclable	Label plate
2280…	280	110	1*	165	145	PP	7,55	50	0,68	280	-	-	-	•	-	•	-	-	•	•
2280…	280	110	1*	200	180	PP	9,37	50	0,71	220	-	-	-	•	-	•	-	-	•	•
2281…	280	110	1*	250	230	PP	11,97	50	0,77	180	-	-	-	•	-	•	-	-	•	•
2281…	280	110	1*	300	280	PP	14,57	50	0,81	140	-	-	-	•	-	•	-	-	•	•
2280…	280	120	75	181	176	PP	8,84	30	0,61	180	-	-	-	•	-	•	-	-	•	-
2280…	280	180	75	181	176	PP	6,36	30	0,69	180	-	-	-	•	-	•	-	-	•	-
2301…	318	152	2*	294	264	PP	16,17	80	1,2	120	-	-	-	•	•	•	-	-	•	•
2355…	355	171	3*	337	305	PP	23,17	80	1,7	84	-	-	-	•	•	•	-	-	•	•
2365…	365	130	80	320	310	PP	28,31	40	1,1	84	-	-	-	-	-	-	-	-	•	-
2375…	375	200	196	71	65	PP	5,13	40	0,51	120	-	-	-	•	-	-	-	-	•	-
2375…	375	200	196	118	110	PP	8,69	40	N/A	108	-	-	-	•	-	-	-	-	•	-
2378…	378	160	156	170	161	PP	14,82	40	0,99	72	-	-	-	•	-	•	-	-	•	-
2390…	390	125	4*	445	415	PP	44,46	80	2,12	60	-	-	-	•	-	-	-	-	•	-
2390…	390	200	75	360	320	PP	28,16	80	2,13	72	-	-	-	•	-	•	•	-	•	-
2402…	395	180	60	185	145	PP	14,07	80	1,48	132	-	-	-	•	-	•	•	-	•	-
2402…	395	180	60	280	240	PP	23,29	80	1,65	84	-	-	-	•	-	•	•	-	•	-
2402…	400	150	75	256	220	PP	23,75	80	1,7	108	•	-	-	•	-	-	-	-	•	•
2402…	400	150	5*	346	310	PP	33,46	80	1,9	84	•	-	-	•	-	-	-	-	•	•
2401…	400	150	75	440	400	PP	43,18	80	2,45	60	•	-	-	•	-	-	-	-	•	•
2401…	400	175	36	146	106	PP	10,77	80	1,66	84	-	-	-	•	-	-	-	-	•	•
2402…	400	150	5*	455	415	PP	44,79	80	2,1	60	-	-	-	•	-	-	-	-	•	•
2402…	400	150	5*	505	465	PP	50,19	80	2,3	48	-	-	-	•	-	-	-	-	•	•
2400…	400	175	75	325	295	PS/ABS	29,96	80	2,0	84	-	-	-	-	-	-	-	-	•	•
2401…	400	175	6*	210	170	PP	17,27	80	1,7	132	-	-	-	•	-	-	-	-	•	•
2401…	400	175	6*	275	235	PP	23,87	80	1,9	96	-	-	-	•	-	-	-	-	•	•
2402…	400	175	4*	337	301	PP	30,57	80	2,0	84	-	-	-	•	-	-	-	-	•	•
2401…	400	175	4*	340	300	PP	30,47	80	2,0	84	-	-	-	•	•	-	-	-	•	•
2401…	400	202	7*	380	340	PP	31,81	200	2,3	60	-	-	-	•	-	-	-	-	•	•
2401…	400	202	7*	440	400	PP	37,43	200	2,4	60	-	-	-	•	-	-	-	-	•	•
2435…	435	125	4*	445	415	PP	56,55	80	2,4	60	-	-	-	•	-	-	-	-	•	•
2435…	435	125	57	485	445	PP	60,64	80	2,6	60	-	-	-	•	-	-	-	-	•	•
2435…	435	319	8*	330	300	PP	19,91	80	3,66	42	-	-	-	•	-	-	-	-	•	•

D4 (mm): 1*= 33, 56, 75, 100. 2*= 70, 75. 3*= 32, 38,5, 75. 4*= 56, 75, 83. 5*= 33, 75, 80. 6*= 36, 76, 100. 7*= 75, 82. 8*= 75, 83. 16*= 36, 56, 60, 75, 80.

Reels 450–500 mm

Art. No.	D1	D2	D4	L1	L2	Material	Winding volume (dm³)	Load capacity	Weight (kg)	Q/Pallet	RFID	Draining holes	Nailing	Autohole (V/U)	Colours	RIB compatible	Cut-out	Label options	Recyclable	Label plate
2451…	450	125	57	470	440	PP	64,55	100	2,8	60	•	-	-	•	•	-	-	-	•	•
2451…	450	250	16	330	290	PP	31,87	100	3,51	42	•	-	-	•	•	-	-	-	•	•
2481…	480	150	4*	444	404	PP	65,93	100	2,9	45	•	-	-	•	•	-	-	-	•	•
2481…	480	202	8*	380	340	PP	50,60	200	3,0	54	•	-	-	•	•	-	-	-	•	•
2481…	480	202	8*	440	400	PP	59,53	200	3,4	45	•	-	-	•	•	-	-	-	•	•
2501…	500	150	4*	444	404	PP	72,15	100	3,1	30	•	-	-	•	•	-	-	•	•	•

D4 (mm): 4*= 56, 75, 83.

Wire

Art. No.	D1	D2	D4	L1	L2	Denomination	Material	Winding volume (dm³)	Weight (kg)	Q/Pallet	RFID	Filaments	Lagging option	Colours	Engravings	Recyclable
2075…	75	40	16	120	100	B1	PS/ABS	0,32	0,092	2400	-	-	-	-	-	•
2080…	80	50	16	80	64	K80/P80	PS	0,20	0,055	3600	-	-	-	-	-	•
2090…	90	40	16	120	100	B2	PS/ABS	0,11	0,11	1920	-	-	-	-	-	•
2100…	100	63	24	100	80	K100	PS/ABS	0,38	0,125	1260	-	-	-	-	-	•
2120…	120	50	16	120	100	B4	PS/ABS	0,93	0,17	936	-	-	-	-	-	•
2125…	125	80	16	125	100	K125/E125	PS/ABS	0,72	0,2	616	-	-	-	-	-	•
2141…	140	90	52	44	38	255g AX140	PC/PS/ABS	0,34	0,138	1380	-	•	-	•	•	•
2155…	155	73	18,5	62	56	C4	PS	0,82	0,14	1020	-	-	-	-	-	•
2160…	160	100	34	160	128	K160	PS/ABS	1,57	0,35	270	-	-	-	-	-	•
2161…	160	90	52	44	38	390g AX160	PC/PS/ABS	0,52	0,148	1242	-	•	-	•	•	•
2201…	200	105	52	53	47	SD 200K	PC/PS/ABS	1,07	0,297	700	-	•	-	•	•	•
2225…	225	73	17	52	46		PS	1,64	0,243	972	-	-	-	-	-	•
2250…	250	160	16	200	160	K250	PA/PS/ABS	4,63	1,050	75	-	-	-	-	-	•
2300…	300	210	51,5	103	91	SD 300K	PS/ABS	3,28	0,6	120	-	•	-	-	-	•
2350…	350	180	52	101	90	AX 350	PC/PS/ABS	6,37	0,78	120	-	•	-	-	-	•
2355…	355	180	36	167	142	AX 355	PS/ABS	10,44	1,03	72	-	•	-	-	-	•
2460…	460	319	305	105	91	SH 460	PS/ABS	7,85	1,85	60	-	-	-	-	-	•

Filaments

Art. No.	D1	D2	D4	L1	L2	Denomination	Material	Winding volume (dm³)	Weight (kg)	Q/Pallet	RFID	Filaments	Lagging option	Colours	Engravings	Recyclable
2141…	140	90	52	44	38	255g AX140	PC/PS/ABS	0,34	0,138	1380	-	•	-	•	•	•
2161…	160	90	52	44	38	390g AX160	PC/PS/ABS	0,52	0,148	1242	-	•	-	•	•	•
2201…	200	105	52	41	35	500g	PC/PS/ABS	0,80	0,175	910	-	•	-	•	•	•
2201…	200	105	52	53	47	750g	PC/PS/ABS	1,07	0,207	700	-	•	-	•	•	•
2201…	200	105	52	67	59	1000g HD	PC/PS/ABS	1,35	0,238	560	-	•	-	•	•	•
2201…	200	105	52	76	70	1000g	PC/PS/ABS	2,25	0,238	490	-	•	-	•	•	•
2300…	300	210	51,5	103	91	SD 300K	PS/ABS	3,28	0,6	120	-	•	-	-	-	•
2350…	350	180	52	101	90	AX 350	PC/PS/ABS	6,37	0,78	120	-	•	-	-	-	•
2355…	355	180	36	167	142	AX 355	PS/ABS	10,44	1,03	192	-	•	-	•	•	•

Drums 600–1190 mm

Art. No.	D1	D2	D4	L1	L2	Denomination	Material	Winding volume (dm³)	Load capacity	Weight (kg)	Q/Pallet	Q/Package	RFID	Draining holes	Lagging option	Cut-out	Cut-out (V/U)	Colours	RIB compatible	Fiber cut-out	Engravings	Recyclable	Label plate
2601…	600	200	80	470	400		PP	100,48	300	6,9	30	75	•	•	•	-	•	•	-	-	•	•	•
2601…	600	250	4*	340	300		PP	70,06	130	4,2	42	105	•	-	-	-	•	•	-	-	•	•	•
2601…	600	250	4*	440	400		PP	93,42	130	5	30	75	•	-	-	-	•	•	-	-	•	•	•
2602…	600	250	4*	470	400	S6	PP	93,42	300	7,2	30	75	•	•	•	-	•	•	-	-	•	•	•
2603…	595	350	80	500	430	AX 600	PP	78,15	650	7,46	16	16	•	•	•	-	•	•	-	-	•	•	•
2603…	595	250	80	500	430	AX 601	PP	98,40	650	7,15	16	16	•	•	•	-	•	•	-	-	•	•	•
2603…	600	250	9*	470	400	K6/HD	PP	93,42	300	7,5	30	75	•	•	•	-	•	•	-	-	•	•	•
2630…	630	250	4*	475	400	Process	ABS	105	N/A	N/A	N/A	N/A	•	-	-	•	-	-	-	-	-	-	-
2630…	630	315	4*	375	315	Process	ABS	73,61	N/A	N/A	N/A	N/A	•	-	-	•	-	-	-	-	-	-	-
2702…	700	325	8*	595	500	S7	PP	150,87	350	11	-	48	•	•	•	14*	•	•	-	•	•	•	•
2704…	700	325	8*	595	500	K7/HD	PP	150,87	400	11	-	48	•	•	•	14*	•	•	-	-	•	•	•
2703…	700	355	9*	602	500	HD	PP	142,86	400	9,7	-	64	•	•	•	14*	-	•	-	-	•	•	•
2710…	710	355	9*	502	400	HD	PP	118,72	400	9,7	-	48	•	•	•	50	-	•	-	-	•	•	•
2753…	753	355	9*	502	400	HD	PP	138,47	400	10,3	-	48	•	•	•	50	-	•	-	-	•	•	•
2800…	800	375	9*	480	400		PP	156,8	400	13	-	45	•	•	•	15*	-	•	-	•	•	•	•
2800…	800	375	9*	500	420		PP	164,64	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2800…	800	375	9*	580	500	S8	PP	196	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2804…	800	375	9*	596	500	K8/HD	PP	196	400	15	-	36	•	•	•	14*	-	•	-	-	•	•	•
2800…	800	400	9*	480	400	DIN800	PP	150,72	400	13	-	45	•	•	•	15*	-	•	-	•	•	•	•
2804…	800	400	9*	496	400	DIN800/HD	PP	150,72	400	15	-	45	•	•	•	14*	-	•	-	-	•	•	•
2800…	800	400	9*	500	420		PP	158,36	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2803…	800	400	10*	502	400	HD	PP	150,72	450	16	-	45	•	•	•	50	-	•	-	-	•	•	•
2803…	800	400	10*	522	420	HD	PP	158,26	450	16	-	36	•	•	•	50	•	•	-	-	•	•	•
2800…	800	400	9*	530	450		PP	169,56	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2803…	800	400	10*	552	450	HD	PP	169,56	450	16	-	36	•	•	•	50	-	•	-	-	•	•	•
2800…	800	400	9*	600	520	UNE800	PP	195,94	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2803…	800	400	10*	602	500	HD	PP	188,4	450	16	-	36	•	•	•	15*	-	•	-	-	•	•	•
2803…	795	450	10*	528	400	HD PRO	PP	134,87	650	15	-	27	•	•	•		-	•	-	•	•	•	•
2803…	795	450	10*	688	560	HD PRO	PP	188,82	650	15	-	27	•	•	•		-	•	-	•	•	•	•
2803…	795	450	10*	750	622	HD PRO	PP	209,72	650	15	-	27	•	•	•		-	•	-	•	•	•	•
2800…	800	500	9*	480	400		PP	122,46	400	13	-	45	•	•	•	15*	-	•	-	•	•	•	•
2800…	800	500	9*	530	450		PP	137,77	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2800…	800	500	9*	540	460		PP	140,83	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2800…	800	500	9*	580	500		PP	153,08	400	13	-	36	•	•	•	15*	-	•	-	•	•	•	•
2900…	900	400	11*	630	510		PP	260,23	750	21	-	27	•	•	•	15*	-	•	-	•	•	•	•
2900…	900	400	11*	670	550	S9	PP	280,64	750	21	-	27	•	•	•	15*	-	•	-	•	•	•	•
2900…	900	400	11*	680	560	DIN900	PP	285,74	750	21	-	18	•	•	•	15*	-	•	-	•	•	•	•
2900…	900	400	11*	700	580		PP	295,95	750	21	-	18	•	•	•	15*	-	•	-	•	•	•	•
2900…	900	400	11*	730	610		PP	311,25	750	21	-	18	•	•	•	15*	-	•	-	•	•	•	•
2903…	900	425	12*	648	550	K9/HD	PP	271,73	750	21	-	27	•	•	•	14*	-	•	-	-	•	•	•
2903…	900	450	12*	658	560	DIN900/HD	PP	267,06	750	21	-	18	•	•	•	14*	-	•	-	-	•	•	•
3100…	1000	500	11*	520	400		PP	235,5	900	28	-	24	•	•	•	15*	-	•	-	•	•	•	•
3100…	1000	500	11*	580	460		PP	270,83	900	28	-	24	•	•	•	15*	-	•	-	•	•	•	•
3100…	1000	500	11*	600	480		PP	282,6	900	28	-	24	•	•	•	15*	-	•	-	•	•	•	•
3100…	1000	500	11*	620	500		PP	294,28	900	28	-	24	•	•	•	15*	-	•	-	•	•	•	•
3100…	1000	500	11*	670	550		PP	323,81	900	28	-	18	•	•	•	15*	-	•	-	•	•	•	•
3100…	1000	500	11*	680	560	DIN1000	PP	329,7	900	28	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	11*	680	560	DIN1000/HD	PP	329,7	900	28	-	18	•	•	•	15*	-	•	-	-	•	•	•
3100…	1000	500	11*	720	600	S10	PP	353,25	900	28	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	12*	740	600	K10/HD	PP	353,25	900	28	-	18	•	•	•	15*	-	•	-	•	•	•	•
3100…	1000	500	11*	730	610	UNE1000	PP	359,14	900	28	-	18	•	•	•	15*	-	•	-	•	•	•	•
3100…	1000	500	11*	780	660		PP	288,58	900	28	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	12*	540	400	HD PRO	PP	235,5	1100	30	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	12*	620	480	HD PRO	PP	282,6	1100	30	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	12*	700	560	HD PRO	PP	329,7	1100	31	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	12*	740	600	HD PRO	PP	353,25	1100	32	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	12*	800	660	HD PRO	PP	388,58	1100	32	-	18	•	•	•	15*	-	•	-	•	•	•	•
3103…	1000	500	12*	980	840	HD PRO	PP	494,55	1100	32	-	18	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	500	12*	554	400	HD PRO	PP	366,16	1500	44	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	500	12*	634	480	HD PRO	PP	439,39	1500	45	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	500	12*	714	560	HD PRO	PP	512,62	1500	45	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	500	12*	754	600	HD PRO	PP	549,23	1500	45	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	500	12*	814	660	HD PRO	PP	604,16	1500	45	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	500	12*	994	840	HD PRO	PP	768,93	1500	47	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	630	12*	774	620	HD PRO	PP	496,04	1500	47	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	630	12*	800	646	HD PRO	PP	516,85	1500	47	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	630	12*	854	700	HD PRO	PP	560,05	1500	47	-	12	•	•	•	15*	-	•	-	•	•	•	•
3120…	1190	630	12*	1004	850	K12/HD PRO	PP	680,06	1500	49	-	12	•	•	•	15*	-	•	-	-	•	•	•

D4 (mm): 4*= 56, 75, 83. 8*= 75, 83. 9*= 75, 80, 83, 100. 10*= 80, 100. 11*= 75, 80, 82, 83, 85, 100, 107. 12*= 75, 80, 107. 13*= 75, 80, 83, 107, 118, 128. Starthole (mm): 14*= 15, 30. 15*= 15, 30, 50.

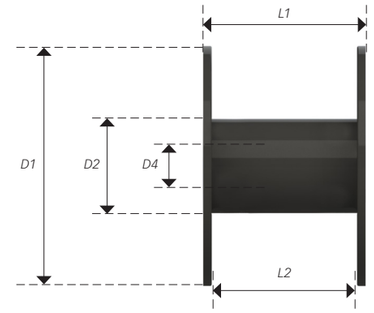

*The reel above is for dimension reference purposes only.

2300…



2390…



2401…



2402…



2601…



2803…



Symbol explanations

Below are the product feature symbols used on pages 14–29.

- *Fiber compatible*
- *Low weight*
- *Unique image*
- *Steel bolt*
- *Draining holes*
- *Possible to repair*
- *Weatherproof*
- *UV-protection*
- *Flange dimensions*
- *Barrel dimensions*
- *Centre hole dimensions*
- *Can be rewound tightly*
- *Automatic packing*
- *Low cost*
- *One piece*
- *Super low weight*
- *Optional colour*
- *Stackable*
- *Returnable by Drumster*
- *Reusable*
- *Recyclable*